

AMENDMENTS TO THE CLAIMS:

This listing of claims will replace all prior versions, and listings, of claims in the application:

LISTING OF CLAIMS:

Claims 1-13 (canceled).

Claims 14-25 (canceled).

Claim 26. (currently amended): A flame retardant epoxy resin composition comprising an epoxy resin (A), a phenolic resin (B), an inorganic filler (C) and a curing accelerator (D):

wherein

said composition is composed of the inorganic filler (C) and resin components other than the inorganic filler (C) that are comprising the epoxy resin (A), the phenolic resin (B) and the curing accelerator (D), but said composition comprises no flame retardant material nor flame retardant auxiliary;

said composition contains the inorganic filler (C) in the equal amount to a content of W (wt%) for the inorganic filler (C) in a cured article being obtainable by

curing the composition, wherein the W (wt%) is selected in range of  $60 < W \leq 95$ ;

the phenolic resin (B) is one or a mixture of two or more phenolic resins containing biphenyl derivative having no hydroxyl group in the molecule,

the epoxy resin (A) is one or a mixture of two or more epoxy resins of tetraphenylethane type to which 3 to 4 epoxy groups ~~epoxy resins of tetraphenylethane type including one or more aromatic moieties, to which 3 to 4 epoxy groups~~ are bonded, and

a ratio (OH/Ep) of a phenolic hydroxyl group number (OH) of the total phenolic resin to an epoxy group number (Ep) of the total epoxy resin is  $1.0 \leq (OH/Ep) \leq 2.5$ ;

the moiety of the biphenyl derivative having no hydroxyl group is included in a crosslinked structure of the cured article; and

a flexural modulus E (kgf/mm<sup>2</sup>) at  $240 \pm 20^\circ\text{C}$  of the cured article is a value satisfying  $0.30W - 13 \leq E \leq 3.7W - 184$  in the case of  $60 < W \leq 95$ , and the cured article forms a foamed layer during thermal decomposition or at ignition to exert flame retardancy.

Claim 27. (previously presented): The epoxy resin composition according to Claim 26,

wherein the flexural modulus  $E$  ( $\text{kgf/mm}^2$ ) at  $240 \pm 20^\circ\text{C}$  of the cured article is a value satisfying  $0.30W - 10 \leq E \leq 3.7W - 199$  value in the case of  $60 < W \leq 95$ .


Claim 28. (previously presented): The epoxy resin composition according to Claim 27,

wherein the ratio (OH/Ep) is 1.0.


Claim 29. (previously presented) The epoxy resin composition according to Claim 28,

wherein

the epoxy resin (A) is a tetraphenylolethane type epoxy resin represented by formula (3):

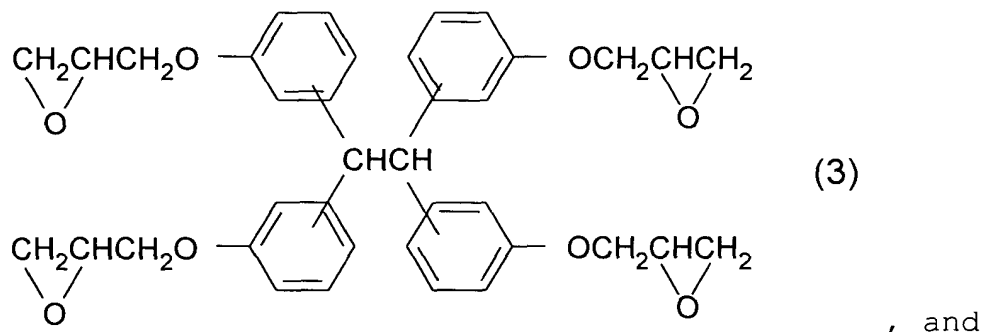

the phenolic resin (B) is a phenolbiphenylaralkyl resin represented by formula (10):

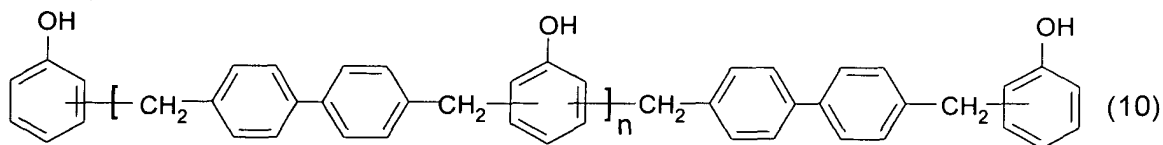

wherein  $n = 0$  to 10.

Claim 30. (previously presented): A flame retardant epoxy resin composition comprising an epoxy resin (A), a phenolic resin (B), an inorganic filler (C) and a curing accelerator (D):

wherein

said composition is composed of the inorganic filler (C) and resin components other than the inorganic filler (C) that are comprising the epoxy resin (A), the phenolic resin (B) and the curing accelerator (D), but said composition comprises no flame retardant material nor flame retardant auxiliary;

said composition contains the inorganic filler (C) in the equal amount to a content of W (wt%) for the inorganic filler (C) in a cured article being obtainable by

curing the composition, wherein the W (wt%) is selected in range of  $60 < W \leq 95$ ;

the phenolic resin (B) is one or a mixture of two or more phenolic resins containing biphenyl derivative having no hydroxyl group in the molecule,

the epoxy resin (A) is a mixture of two or more epoxy resins containing a biphenyl derivative, and

a ratio (OH/Ep) of a phenolic hydroxyl group number (OH) of the total phenolic resin to an epoxy group number (Ep) of the total epoxy resin is 1.0;

the moiety of the biphenyl derivative having no hydroxyl group is included in a crosslinked structure of the cured article; and

a flexural modulus E (kgf/mm<sup>2</sup>) at  $240 \pm 20^\circ\text{C}$  of the cured article is a value satisfying  $0.30W - 13 \leq E \leq 3.7W - 184$  in the case of  $60 < W \leq 95$ , and the cured article forms a foamed layer during thermal decomposition or at ignition to exert flame retardancy.

Claim 31. (previously presented): The epoxy resin composition according to Claim 30,

wherein

wherein the flexural modulus E (kgf/mm<sup>2</sup>) at 240 ± 20°C of the cured article is a value satisfying  $0.30W - 10 \leq E \leq 3.7W - 199$  value in the case of  $60 < W \leq 95$ .


Claim 32. (previously presented): The epoxy resin composition according to Claim 31,

wherein the ratio (OH/Ep) is 1.0.

Claim 33. (previously presented): The epoxy resin composition according to Claim 32,


wherein

the epoxy resin (A) is a combinational mixture of biphenyl-4,4'-diglycidyl ether epoxy resin and 3,3',5,5'-tetramethylbiphenyl-4,4'-diglycidyl ether epoxy resin represented by formula (4):

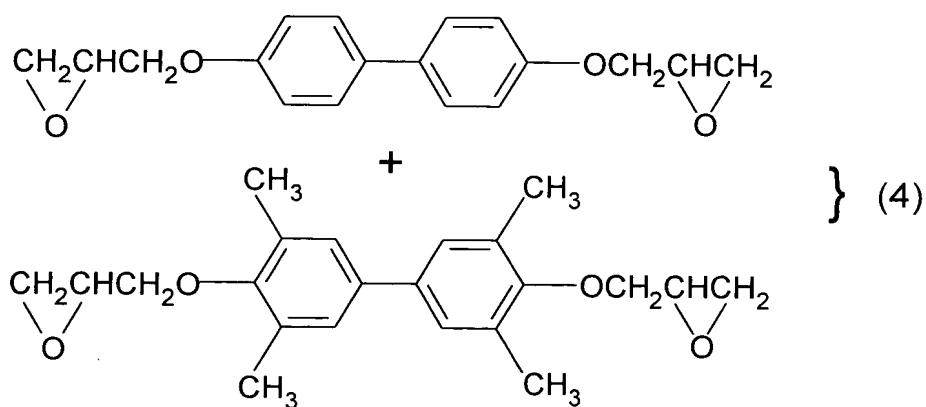

, and

the phenolic resin (B) is a phenolbiphenylaralkyl resin represented by formula (10):

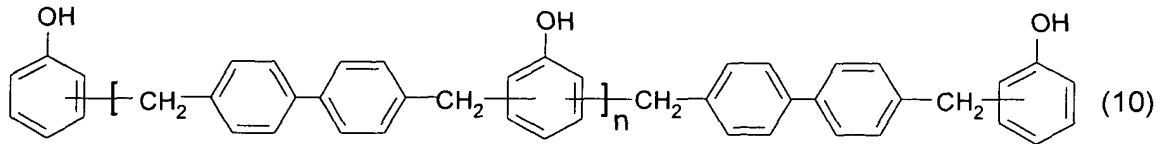

wherein  $n = 0$  to 10.

Claim 34. (currently amended): A flame retardant epoxy resin composition comprising an epoxy resin (A), a phenolic resin (B), an inorganic filler (C) and a curing accelerator (D):

wherein

said composition is composed of the inorganic filler (C) and resin components other than the inorganic filler (C) that are comprising the epoxy resin (A), the phenolic resin (B) and the curing accelerator (D), but said composition comprises no flame retardant material nor flame retardant auxiliary;

said composition contains the inorganic filler (C) in the equal amount to a content of W (wt%) for the inorganic filler (C) in a cured article being obtainable by

curing the composition, wherein the W (wt%) is selected in range of  $60 < W \leq 95$ ;

the phenolic resin (B) is one or a mixture of two or more phenolic resins containing a biphenyl derivative having no hydroxyl group in the molecule,

the epoxy resin (A) is a mixture of an epoxy resin containing a biphenyl derivative having no epoxy group and an epoxy resin of tetraphenylethane type to which 3 to 4 epoxy groups ~~an epoxy resin of tetraphenylethane type including one or more aromatic moieties, to which 3 to 4 epoxy groups~~ are bonded, and

a ratio (OH/Ep) of a phenolic hydroxyl group number (OH) of the total phenolic resin to an epoxy group number (Ep) of the total epoxy resin is  $1.0 \leq (OH/Ep) \leq 2.5$ ;

the moiety of the biphenyl derivative having no hydroxyl group is included in a crosslinked structure of the cured article; and

a flexural modulus E (kgf/mm<sup>2</sup>) at  $240 \pm 20^\circ\text{C}$  of the cured article is a value satisfying  $0.30W - 13 \leq E \leq 3.7W - 184$  in the case of  $60 < W \leq 95$ , and the cured article forms a foamed layer during thermal decomposition or at ignition to exert flame retardancy.



Claim 35. (previously presented): The epoxy resin composition according to Claim 34,

wherein

wherein the flexural modulus  $E$  ( $\text{kgf/mm}^2$ ) at  $240 \pm 20^\circ\text{C}$  of the cured article is a value satisfying  $0.30W - 10 \leq E \leq 3.7W - 199$  value in the case of  $60 < W \leq 95$ .


Claim 36. (previously presented): The epoxy resin composition according to Claim 35,

wherein the ratio (OH/Ep) is 1.0.


Claim 37. (previously preseneted): The epoxy resin composition according to Claim 36,

wherein

the epoxy resin (A) is a combinational mixture of a phenolbiphenylaralkyl epoxy resin represented by formula (2):

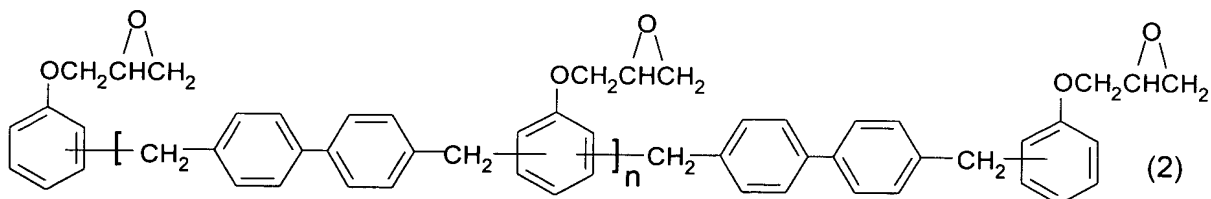


wherein  $n = 0$  to 10, with a tetraphenylolthane type epoxy resin represented by formula (3):

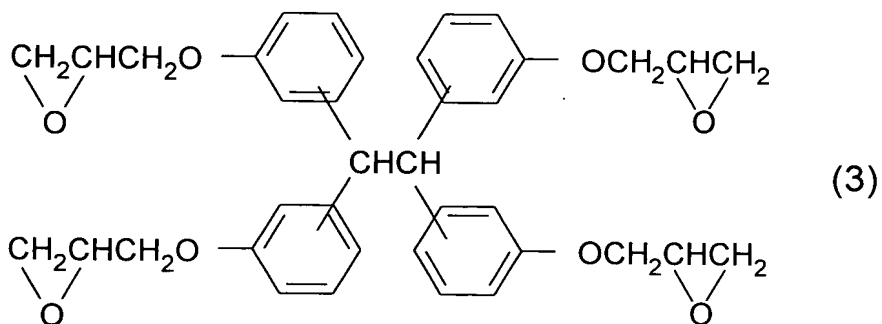

, and

the phenolic resin (B) is a phenolbiphenylalkyl resin represented by formula (10):

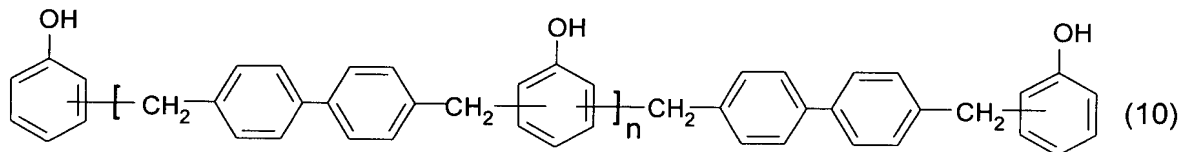

wherein  $n = 0$  to 10.

Claim 38. (currently amended): A semiconductor device in which the epoxy resin composition described in Claim [[1]] 26 is used as an encapsulating resin.

Cancel claims 39-43.

Claim 44. (new): A semiconductor device in which  
the epoxy resin composition described in Claim 30 is used  
as an encapsulating resin.

Claim 45. (new): A semiconductor device in which  
the epoxy resin composition described in Claim 34 is used  
as an encapsulating resin.